




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF THE SSC CONTROLS COMPANY AND IS NOT TO BE USED, REPRODUCED, OR DISCLOSED WITHOUT THE EXPRESS WRITTEN PERMISSION OF THE SSC CONTROLS COMPANY.

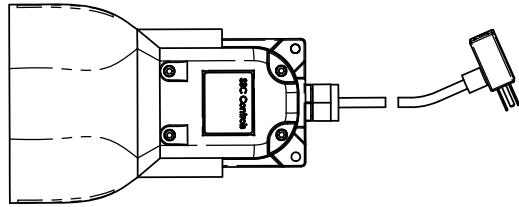

MODELS WITH PLUG (EXAMPLE: G500-MO-1501)

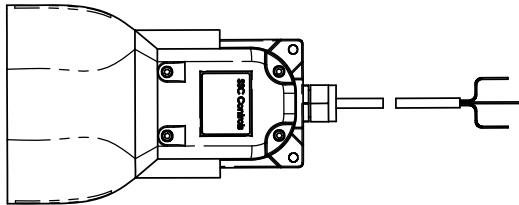

MODELS WITH LEADS (EXAMPLE: G500-MO-1502)

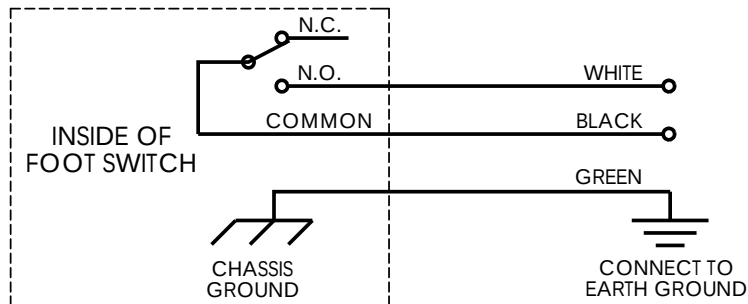

WIRING DIAGRAM (MODELS WITH LEADS):
SHOWN IN THE AT-REST OR OFF POSITION --
THE SWITCH IS OFF UNTIL THE PEDAL IS PRESSED.

CABLE LENGTH: 8 FEET
CSA/NEMA ENCLOSURE TYPE 2,4,13
SEE SPECIFIC MODELS FOR ELECTRICAL RATINGS.
AVAILABLE IN MOMENTARY, MAINTAINED, AND ANTI-TRIP ACTION.
CERTIFICATIONS: CSA C/US

MODELS WITH 3-PRONGED PIGGYBACK PLUG:

PLUG INTO ANY STANDARD 120V WALL OUTLET (NORTH AMERICAN),
THEN PLUG YOUR DEVICE INTO THE BACK END OF THE PIGGYBACK PLUG.
WHEN YOU PRESS THE FOOT SWITCH, THE DEVICE WILL TURN ON.

MODELS WITH LEADS (SEE WIRING DIAGRAM):

- 1) DISCONNECT INPUT POWER BEFORE INSTALLING OR SERVICING.
- 2) THE SWITCH IS TYPICALLY WIRED INTO ONE SIDE OF THE ELECTRICAL CIRCUIT (NORMALLY THE "HOT" SIDE, IF APPLICABLE).
- 3) FOLLOW ALL APPLICABLE ELECTRICAL CODES AND CONSULT AN ELECTRICIAN WITH QUESTIONS.
- 4) THE WHITE AND BLACK LEAD COLORS ON THE FOOT SWITCH CABLE HAVE NO RELEVANCE TO HOUSEHOLD WIRING COLORS.

WARNING: TO AVOID PERSONAL INJURY, DO NOT USE FOOT SWITCHES ON MACHINERY LACKING EFFECTIVE POINT-OF-OPERATION SAFEGUARDS.

DISCONNECT INPUT POWER BEFORE INSTALLING OR SERVICING ANY FOOT SWITCH.

CONSULT A QUALIFIED ELECTRICIAN WITH QUESTIONS REGARDING SELECTION AND INSTALLATION OF A FOOT SWITCH.

REVIEW THE FOOT SWITCH SAFETY WARNING BEFORE THE SELECTION, INSTALLATION, USE, AND MAINTENANCE OF THIS CONTROL.
THE FOOT SWITCH SAFETY WARNING IS SUPPLIED WITH EACH FOOT SWITCH (CONTACT SSC FOR ADDITIONAL COPIES).

CONTACT INFO:
THE SSC CONTROLS CO.
PH: 440-205-1600
FAX: 440-205-1700
EMAIL: MAIL@SSCCONTROLS.COM
WEBSITE: WWW.SSCCONTROLS.COM

The SSC Controls Company

8909 EAST AVENUE
MENTOR, OHIO, USA 44060

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES
AND TOLERANCES ARE AS FOLLOWS:

FOR 2 DECIMAL PLACES: $\pm .02$
FOR 3 DECIMAL PLACES: $\pm .002$
FOR ANGLES: $\pm .5$ OF A DEGREE

DRAWING INFORMATION

DRAWN BY: **BAM**

CHECKED BY: **JEM**

DATE: **8/26/24**

SCALE: **NONE**

DRAWING NAME:

**G-SERIES WITH CABLE
WIRING DIAGRAM**

DRAWING NUMBER:

31400-A