



# THE SSC CONTROLS COMPANY

THE FOOT SWITCH EXPERTS®

## Product Information Sheet

### F330-1342 F-Series Foot Switch

This foot switch features the tough die-cast zinc housing and rugged construction of the F-Series, and comes pre-wired both normally open and normally closed. This unit has “maintained” action – press once to turn on (or vice versa), and press again to turn off.


#### Design features:

- Die-cast housing provides superior appearance and durability.
- Durable zinc alloy will not rust or easily break.
- Powder-painted black with bottom traction pad.
- Comes pre-wired both normally open and normally closed, with “maintained” action.
- Includes two exterior mounting holes for bolt-down option.



#### Quality features:

- Quality system certified to ISO 9001.
- Includes a 1-year warranty on parts and labor.
- Made in USA of imported and domestic components.

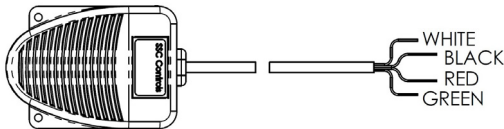


Dimensions (L x W x H): 4.8” x 3.5” x 1.8”

Weight: 3.2 pounds

Finish: powder paint

Enclosure rating: CSA Type 1; IEC IP-21

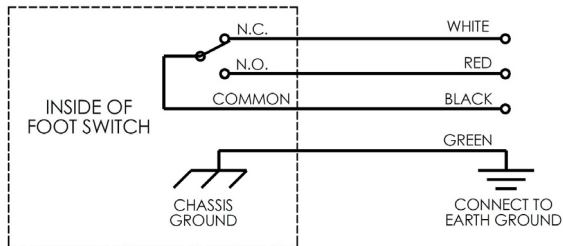

WIRING DIAGRAM:  
SHOWN IN THE AT-REST OR UPRIGHT POSITION.



**Warning:** To avoid personal injury, do not use foot switches on machinery lacking effective point-of-operation safeguards. Disconnect input power before installation or maintenance. Only a certified electrician should install this foot switch.

Model	Action*	Switches	Electrical Rating	Cable	Certifications
F330-1342	Maintained	1	13 A, 125 VAC; 10 A, 250 VAC; wired N.O. and N.C.	cable with leads	

\*Maintained action – Press once to turn on (or vice versa), and press again to turn off; the user can remove his or her foot and the pedal will stay in position until tapped again.

The SSC Controls Company  
8909 East Avenue Mentor, Ohio 44060  
Phone: 440 205-1600 Fax: 440 205-1700